Empowered by Innovation NEC

NEC Express5800/GT110d-S Configuration Guide

Air cooling model

Introduction

This document contains product and configuration information that will enable you to configure your system. The guide will ensure fast and proper configuration of your NEC Express5800 server.

February 2012
Revision 1.0
NEC Corporation

Contents

TECHNICAL SPECIFICATION 3
Key Features 3
Specification 3
EXTERNAL VIEWS 7
Front and Rear Views 7
Dimensions (mm) 8
CONFIGURATION DIAGRAM 9
SERVER CONFIGURATION 10
1 Base Models 10
2 Processor 10
3 Memory 10
Maximum Available Memory 11
4 Internal Hard Disk Drives 12
4.1 RAID Configuration 12
4.2 Internal Drive Configuration 13
5 Internal Optical Drive 24
6 Internal Tape / RDX Drives 24
6.1 Tape / RDX Drive Selection 24
6.2 Tape / RDX Configuration 24
7 Internal Flash Memory 25
8 PCI Card 26
8.1 LAN/SCSI Controller 26
8.2 Serial Port Adapter 26
9 Other Add-in Components 26
9.1 Input Devices 26
10 Add-on Components 26
10.1 Server Management License 26
10.2 Dust / Insect Proof Kit 27
10.3 Flash FDD 27
10.4 Medium and Cartridge 27
REFERENCES 28
Note for Ordering 28
Server Management 28
OS Support Matrix for PCI Cards 29
Supporting PCI Cards and Installable Slots 29
Copyright Notice and Liability Disclaimer 30
REVISION HISTORY 31

Technical Specification

Key Features

- Ultra compact form of 93mm in width, 13 liter in volume
- High performance with the latest Intel® Xeon® processor E3-1200 series
- Up to 32 GB of high speed DDR3-1333 memory
- Full manageability by integrated EXPRESSSCOPE Engine 3
- Heat resilience: maximum 40° C / 104° F operating ambient temperature

Specification

3.5-inch Drive Model

Model		GT110d-S	
Part Number		N8100-1857F	
Processor	**Type**	Intel® Pentium® processor G630	Intel® Xeon® processor E3-1220
	Clock speed	2.70 GHz	3.10 GHz
	Number of Processors	1	
	Cache	3 MB	8 MB
	Cores and Threads	2C / 2T	4C / 4T
Chipset		Intel® C204 Chipset	
Memory	**Type**	DDR3-1333 ECC Unbuffered DIMM	
	Standard Capacity	0 GB	
	Maximum Capacity	32 GB (4 x 8 GB)	
Internal Storage	**Standard Capacity**	0 GB	
	Maximum Capacity	3.5-inch SATA : 6 TB (2 x 3 TB)	
	Disk Controller	SATA : 3Gb/s (Integrated)	
	RAID	SATA : [1] [2] RAID 0/1	
	Hot Plug	-	
	Optical Disk Drive	Slim DVD-ROM	
	3.5-inch Media Bays [free]	1 [1]	
	Disk Drive Bays [free]	3.5-inch: 2 [2]	
Expansion Slots [free]		Total: 4 slots available 1 [1] x PCIe 2.0 x16 (x16 connector) 2 [2] x PCIe 2.0 x4 (x8 connector) 1 [1] x 32-bit/33 MHz PCI	
Video Controller (VRAM)		Integrated in Server Management Controller (32MB)	
Interfaces		1 x VGA (15-pin mini D-sub,1x rear) 1 x Serial (9-pin mini D-sub, RS232-C, Serial A, 1 x rear) 8x USB2.0 (2 x front, 4 x rear, 2 x internal) 2x 1000BASE-T LAN connector (1000BASE-T / 100BASE-TX / 10BASE-T, RJ-45, 2 x rear) 1 x Management LAN connector (100BASE-TX / 10BASE-T, RJ-45, 1 x rear)	
Server Management		EXPRESSSCOPE Engine 3	
System Fan		Standard	
Power Supply		1 x 250 Watt 80 PLUS® Sliver certified non-Hot plug PSU 100-240 VAC ± 10% 50 / 60 Hz ± 3 Hz	

Model		GT110d-S	
Power Consumption	**(100VAC, Max. Config, Idling)**	78 VA / 75 Watt	83 VA / 80 Watt
	(100VAC, Max. Config, Operating)	118 VA / 117 Watt	185 VA / 183 Watt
Acoustical Noise (Sound Pressure Level) [3]	**Minimum Config.**	30.2 dB	30.6 dB
	Maximum Config.	30.9 dB	37.2 dB
Dimensions (W x D x H)		93 x 386 x 363 mm / 3.8 x 15.2 x 14.3 in (4U)	
Weight (Minimum / Maximum)		9 kg / 12 kg, 19.84 lbs. / 26.46 lbs.	
Temperature, Relative Humidity (non-condensing)		Operating: 10° to 40° C / 50° to 104° F, 20 to 80% Non-Operating: -10° to 55° C / 14° to 131° F, 20 to 80%	
Regulatory and Safety		FCC, CE, BSMI, CCC, UL, CB, RoHS, WEEE	
Operating Systems and Virtualization Software		Microsoft® Windows Server® 2003 R2, Standard Edition SP2 or later Microsoft® Windows Server® 2003 R2, Standard x64 Edition SP2 or later Microsoft® Windows Server® 2008 Standard Microsoft® Windows Server® 2008 Standard (x64) Microsoft® Windows Server® 2008 Enterprise Microsoft® Windows Server® 2008 Enterprise (x64) Microsoft Windows Server 2008 R2 Standard Microsoft Windows Server 2008 R2 Enterprise Red Hat Enterprise Linux 5.6 or later [4] Red Hat Enterprise Linux 5.6 or later (EM64T) [4] Red Hat Enterprise Linux 6.1 or later [4] Red Hat Enterprise Linux 6.1 or later (EM64T) [4] VMware ESXi™ 5.0	

[1] Embedded SATA RAID controller is supported only on Windows operating systems.

[2] Embedded SATA RAID Controller does not support RAID 10 configured with 2TB and 3TB HDDs.

[3] Noise emission was measured in accordance with ISO 7779. The actual value may vary by the operating environment.

[4] For Linux support, contact our sales representative or go to the NEC website at: http://www.nec.com/global/prod/express/linux/index.html

2.5-inch Drive Model

Model		GT110d-S	
Part Number		N8100-1858F	
Processor	**Type**	Intel® Pentium® processor G630	Intel® Xeon® processor E3-1220
	Clock speed	2.70 GHz	3.10 GHz
	Number of Processors	1	
	Cache	3 MB	8 MB
	Cores and Threads	2C / 2T	4C / 4T
Chipset		Intel® C204 Chipset	
Memory	**Type**	DDR3-1333 ECC Unbuffered DIMM	
	Standard Capacity	0 GB	
	Maximum Capacity	32 GB (4 x 8 GB)	
Internal Storage	**Standard Capacity**	0 GB	
	Maximum Capacity	SAS : 4.5 TB (5 x 900 GB) [2] SATA : 5 TB (5 x 1 TB) [2] SSD : 500 GB (5 x 100 GB) [2]	

Model		GT110d-S	
Internal Storage (Cont.)	Disk Controller	SATA : 3Gb/s (Integrated) SAS : 6 Gb/s (Optional)	
	RAID	SATA : [1] RAID 0/1/10 (Standard), RAID 5/6 (Optional) SAS : RAID 0/1/5/6/10 (Optional)	
	Hot Plug	Supported	
	Optical Disk Drive	Slim DVD-ROM	
	3.5-inch Media Bays [free]	1 [1]	
	Disk Drive Bays [free]	5 [5] [2]	
Expansion Slots [free]		Total: 4 slots available 1 [1] x PCIe 2.0 x16 (x16 connector) 2 [2] x PCIe 2.0 x4 (x8 connector) 1 [1] x 32-bit/33 MHz PCI	
Video Controller (VRAM)		Integrated in Server Management Controller (32MB)	
Interfaces		1 x VGA (15-pin mini D-sub,1x rear) 1 x Serial (9-pin mini D-sub, RS232-C, Serial A, 1 x rear) 8x USB2.0 (2 x front, 4 x rear, 2 x internal) 2x 1000BASE-T LAN connector (1000BASE-T / 100BASE-TX / 10BASE-T, RJ-45, 2 x rear) 1 x Management LAN connector (100BASE-TX / 10BASE-T, RJ-45, 1 x rear)	
Server Management		EXPRESSSCOPE Engine 3	
System Fan		Standard	
Power Supply		1 x 250 Watt 80 PLUS® Sliver certified non-Hot plug PSU 100-240 VAC ± 10% 50 / 60 Hz ± 3 Hz	
Power Consumption	(100VAC, Max. Config, Idling)	107 VA / 101 Watt	112 VA / 108 Watt
	(100VAC, Max. Config, Operating)	146 VA / 144 Watt	221 VA / 220 Watt
Acoustical Noise (Sound Pressure Level) [3]	Minimum Config.	37.5 dB	37.3 dB
	Maximum Config.	37.6 dB	39.8 dB
Dimensions (W x D x H)		93 x 386 x 363 mm / 3.8 x 15.2 x 14.3 in (4U)	
Weight (Minimum / Maximum)		9 kg / 12 kg, 19.84 lbs. / 26.46 lbs.	
Temperature, Relative Humidity (non-condensing)		Operating: 10° to 40° C / 50° to 104° F, 20 to 80% Non-Operating: -10° to 55° C / 14° to 131° F, 20 to 80%	
Regulatory and Safety		FCC, CE, BSMI, CCC, UL, CB, RoHS, WEEE	
Operating Systems and Virtualization Software		Microsoft® Windows Server® 2003 R2, Standard Edition SP2 or later Microsoft® Windows Server® 2003 R2, Standard x64 Edition SP2 or later Microsoft® Windows Server® 2008 Standard Microsoft® Windows Server® 2008 Standard (x64) Microsoft® Windows Server® 2008 Enterprise Microsoft® Windows Server® 2008 Enterprise (x64) Microsoft Windows Server 2008 R2 Standard Microsoft Windows Server 2008 R2 Enterprise Red Hat Enterprise Linux 5.6 or later [4] Red Hat Enterprise Linux 5.6 or later (EM64T) [4] Red Hat Enterprise Linux 6.1 or later [4] Red Hat Enterprise Linux 6.1 or later (EM64T) [4] VMware ESXi™ 5.0	

[1] Embedded SATA RAID controller is supported only on Windows operating systems.

[2] An optional HDD Cage is required to install more than 3 hard drives. The optional HDD Cage occupies 3.5-inch media bay.

[3] Noise emission was measured in accordance with ISO 7779. The actual value may vary by the operating environment.

[4] For Linux support, contact our sales representative or go to the NEC website at: http://www.nec.com/global/prod/express/linux/index.html

External Views

Front and Rear Views

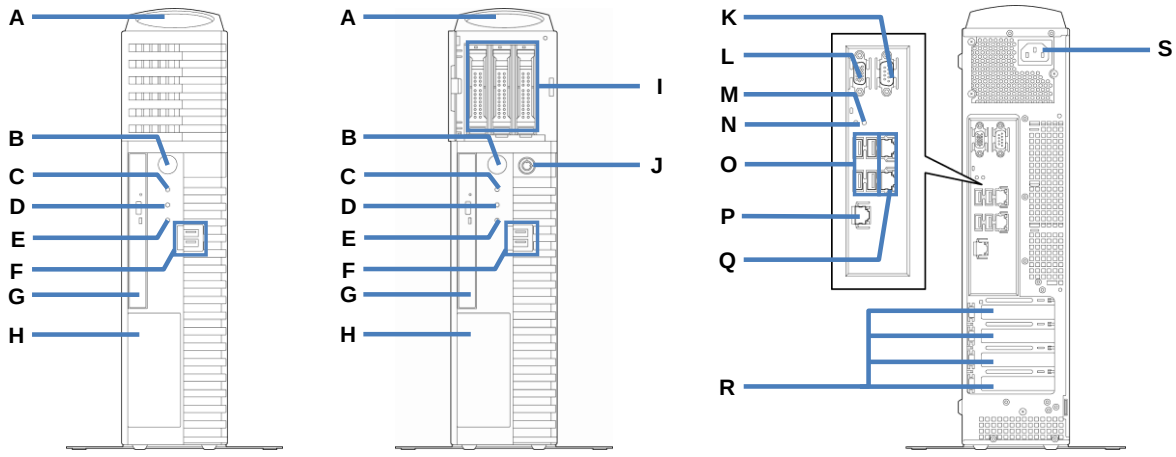

3.5-inch Drive Model

2.5-inch Drive Model

Front View

Rear View

Legend			
A.	Vent Holes Cover	**K.**	Serial Port Connector
B.	Power Button	**L.**	VGA Connector
C.	Power LED	**M.**	BMC Reset Switch
D.	Hard Drive Activity LED	**N.**	Dump (NMI) Switch
E.	System Status LED	**O.**	USB Connectors
F.	USB Connectors	**P.**	Management LAN Connector
G.	Optical Disk Drive	**Q.**	Data LAN Connectors
H.	3.5-inch Media Bay	**R.**	PCI Slots
I.	2.5-inch HDD Bay	**S.**	AC Inlet
J.	HDD Bay Cover Key		

Dimensions (mm)

Tower Installation



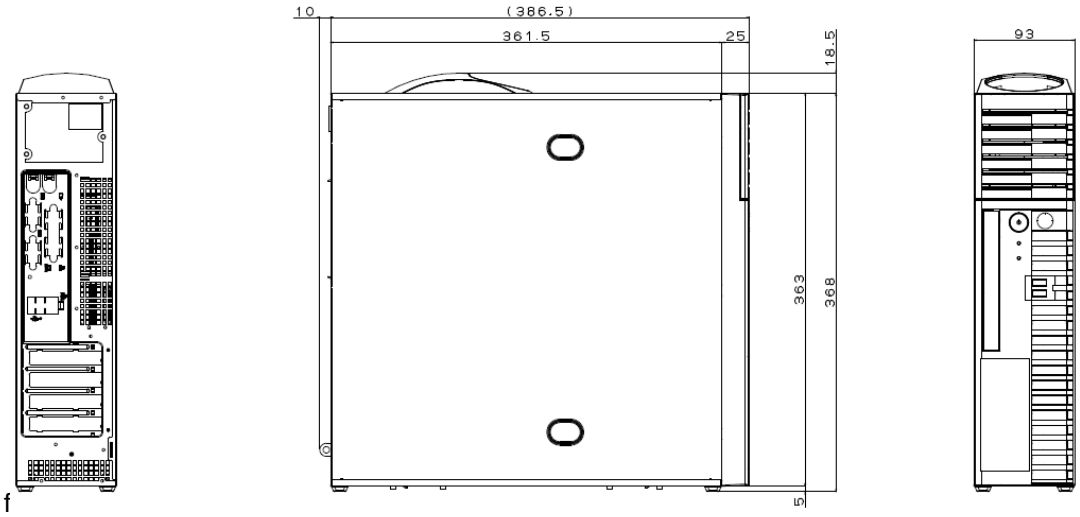

Desktop Installation

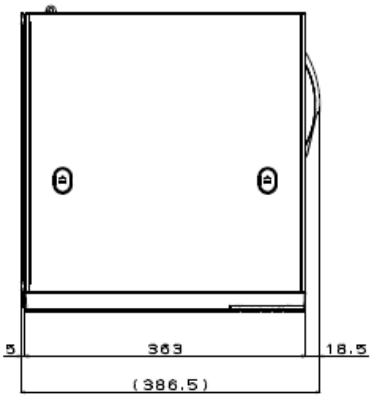







Configuration Diagram

3.5-inch Drive Model

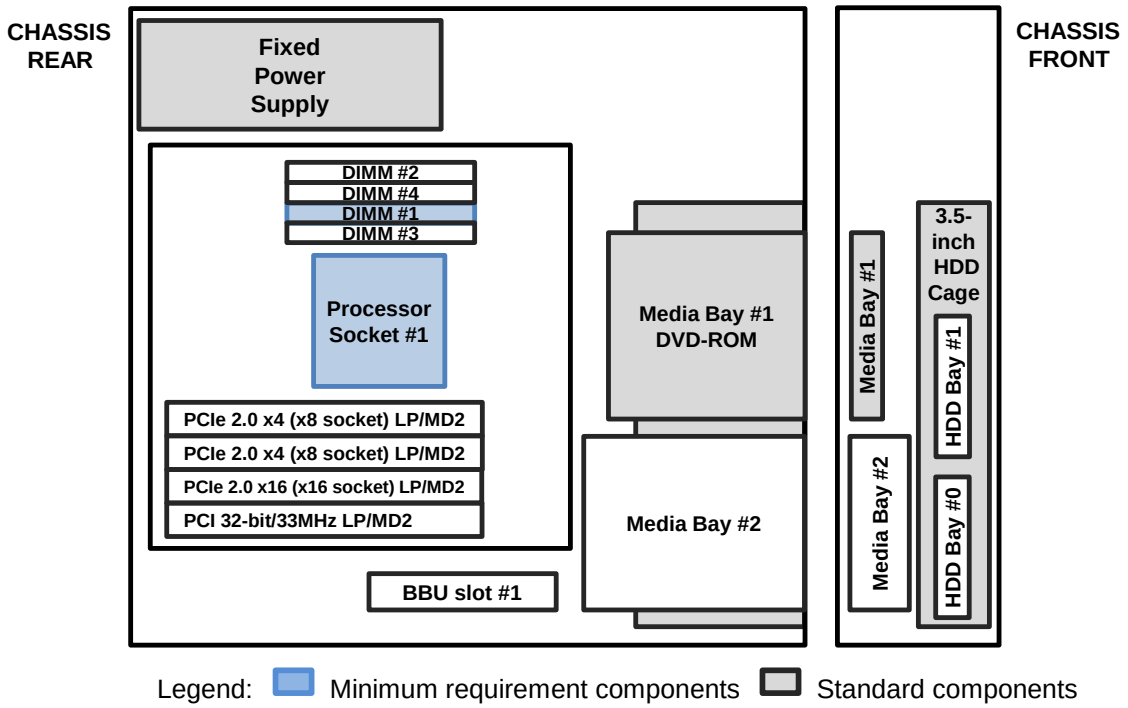

Legend: Minimum requirement components Standard components

2.5-inch Drive Model

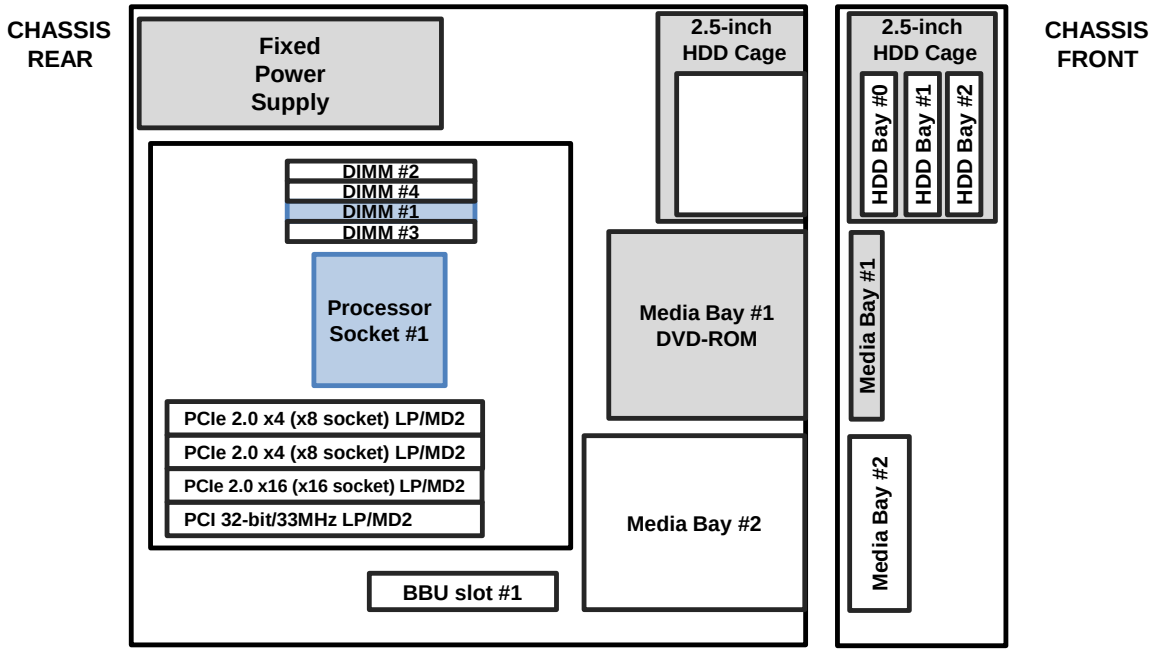

Legend: Minimum requirement components Standard components

Server Configuration

1 Base Models

Product Name / Description	Part Number
NEC Express5800 GT110d-S Server no processor, no RAM, no 3.5-inch HDD Including: 1x Slim DVD-ROM drive, 3.5-inch HDD Cage, EXPRESSBUILDER DVD	N8100-1857F
NEC Express5800 GT110d-S Server no processor, no RAM, no 2.5-inch HDD Including: 1x Slim DVD-ROM drive, 2.5-inch HDD Cage, EXPRESSBUILDER DVD	N8100-1858F

NOTE:

- The base model must be ordered with a processor kit.

2 Processor

Available sockets: 1

Product Name / Description	Part Number
Processor Kit (2C/G630) Intel® Pentium® Processor G630 (2.70GHz / 2C-2T / 3MB)	N8101-528F
Processor Kit (4C/E3-1220) Intel® Xeon® Processor E3-1220 (3.10 GHz / 4C-4T / 8 MB)	N8101-504F

NOTE:

- One processor kit from above must be installed.
- The processor kit must be ordered with the base model.

3 Memory

Available slots: 4

Product Name / Description	Part Number
2GB Memory Kit 2GB (1x 2 GB) DDR3-1333 ECC Unbuffered DIMM	N8102-416F
4GB Memory Kit 4GB (1x 4 GB) DDR3-1333 ECC Unbuffered DIMM	N8102-417F
8GB Memory Kit 8GB (1x 8 GB) DDR3-1333 ECC Unbuffered DIMM	N8102-418F

NOTE:

- Minimum one memory kit must be installed.
- It is recommended to install two identical memory kits for dual-channel symmetric configuration to increase memory transfer speed.
- Actual DIMM speed sets to 1066 MHz when you choose Pentium Processor.

Maximum Available Memory

See the table below for the maximum memory size that you can actually use on your system.

The maximum available memory is less than the maximum physical memory supported by your system because some chipsets require PCI resource space of about 750MB. PCI resource requirements vary depending on the type and the number of PCI cards you are using.

Maximum memory size supported by OS		Maximum available memory
4 GB	Microsoft Windows Server 2003 R2, Standard Edition Microsoft Windows Server 2008 Standard	**4 GB(HW-DEP enabled)** **App. 3.3 GB (HW-DEP disabled)**
32 GB	Microsoft Windows Server 2003 R2, Standard x64 Edition Microsoft Windows Server 2008 Standard (x64) Microsoft Windows Server 2008 R2 Standard (x64)	**32 GB**
64 GB	Microsoft Windows Server 2003 R2, Enterprise Edition Microsoft Windows Server 2008 Enterprise	**32 GB**
1 TB	Microsoft Windows Server 2003 R2, Enterprise x64 Edition	**32 GB**
2 TB	Microsoft Windows Server 2008 Enterprise (x64) Microsoft Windows Server 2008 R2 Enterprise (x64)	**32 GB**
16 GB	Red Hat Enterprise Linux 5 Red Hat Enterprise Linux 6	**16 GB**
256 GB	Red Hat Enterprise Linux 5 (EM64T)	**32 GB**
2 TB	Red Hat Enterprise Linux 6 (EM64T)	**32 GB**

4 Internal Hard Disk Drives

4.1 RAID Configuration

Refer to the section in accordance with your disk form factor and RAID configuration.

4.1.1 3.5-inch Drive

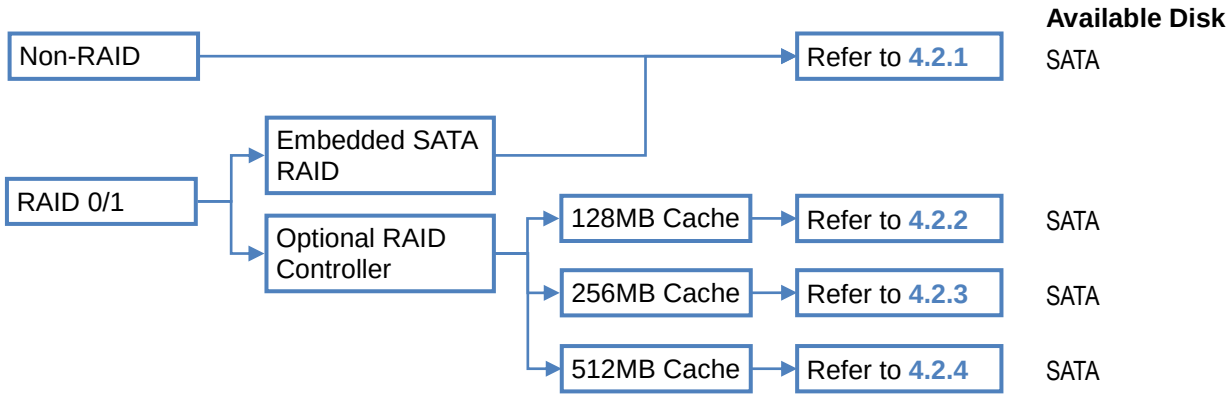

NOTE:

- Embedded SATA RAID controller is supported only on Windows operating systems. An optional RAID controller is required to configure RAID array for other operating systems.
- All hard drives within a RAID array should be of the same capacity.
- An optional RAID controller occupies one PCI slot.

4.1.2 Up to three 2.5-inch Drive

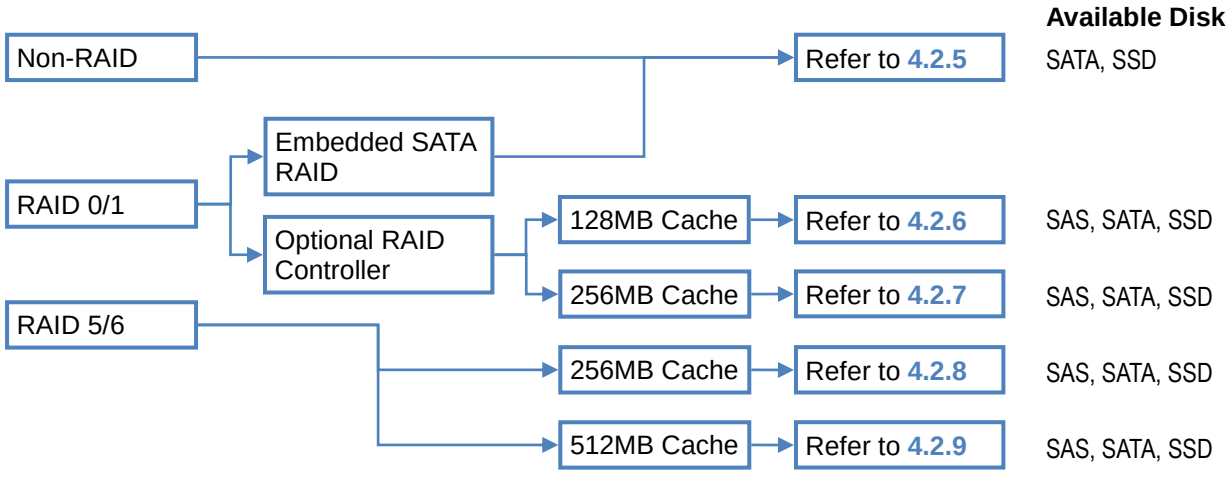

NOTE:

- Embedded SATA RAID controller is supported only on Windows operating systems. An optional RAID controller is required to configure RAID array for other operating systems.
- All hard drives within a RAID array should be of the same capacity and rotation speed.
- Mixing SAS and SATA hard drives in the same system is not supported.
- Hot plug insertion/removal is not supported with the embedded SATA non-RAID controller..
- An optional RAID controller occupies one PCI slot.

4.1.3 Up to five 2.5-inch Drive

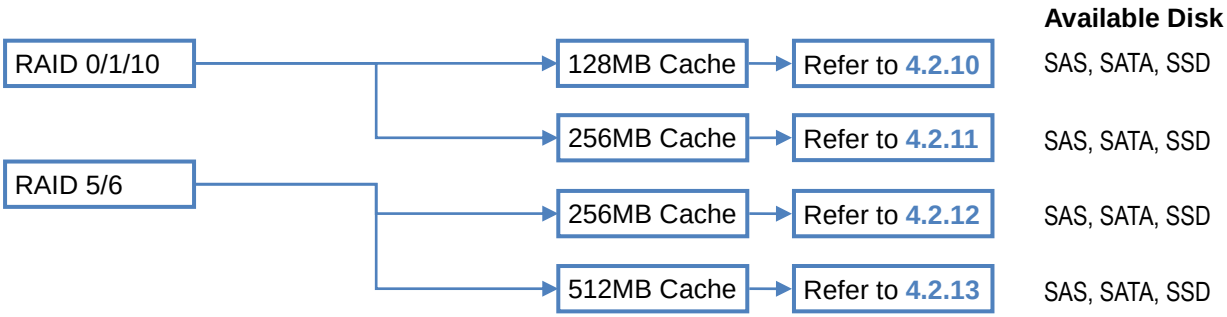

NOTE:

- An optional RAID controller occupies one PCI slot.
- All hard drives within a RAID array should be of the same capacity and rotation speed.
- SAS and SATA hard drives must be installed in separate HDD Cages.
- No internal tape drive can be installed in the drive configuration.

4.2 Internal Drive Configuration

4.2.1 3.5-inch Drive with Embedded SATA Controller

Category	Product Name / Description	Part Number
Storage Controller	**Embedded SATA Controller** 2 x SATA ports, RAID 0/1 capable	(Standard)
Cable	**Internal SATA Cable** 1x SATA to 1x SATA, 2 sets	(Standard)
HDD Cage	**3.5-inch HDD Cage** 2 x 3.5-inch non hot plug (fixed) hard drive bays	(Standard)
HDD **2 slots available**	**160GB HDD** 1 x 160 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-372
	250GB HDD 1 x 250 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-373
	500GB HDD 1 x 500 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-343
	1TB HDD 1 x 1 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-260
	2TB HDD 1 x 2 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-284
	3TB HDD 1 x 3 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-339

NOTE:

- Embedded SATA RAID controller is supported only on Windows operating systems. An optional RAID controller is required to configure RAID array for other operating systems.
- 3 TB HDDs are not supported with the embedded SATA non-RAID controller.
- All hard drives within a RAID array should be of the same capacity.

4.2.2 3.5-inch Drive with RAID 0/1 Controller with 128 MB Cache

Category	Product Name / Description	Part Number
Storage Controller **Required**	**RAID Controller (128MB, RAID 0/1)** Promise SuperTrak TX8760T-128 RAID 0/1/10, 128MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-128
RAID BBU **Recommended**	**RAID Battery Backup Unit** for Promise SuperTrak EX8760T	N8103-141
Cable **Required**	**Internal SATA Cable** 1x mini-SAS to 2x SATA	K410-253(00)
HDD Cage	**3.5-inch HDD Cage** 2 x 3.5-inch non hot plug (fixed) hard drive bays	(Standard)
HDD **2 slots available**	**160GB HDD** 1 x 160 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-372
	250GB HDD 1 x 250 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-373
	500GB HDD 1 x 500 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-343
	1TB HDD 1 x 1 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-260
	2TB HDD 1 x 2 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-284
	3TB HDD 1 x 3 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-339

NOTE:

- All hard drives within a RAID array should be of the same capacity.

4.2.3 3.5-inch Drive with RAID 0/1 Controller with 256 MB Cache

Category	Product Name / Description	Part Number
Storage Controller **Required**	**RAID Controller (256MB, RAID 0/1)** LSI MegaRAID SAS 9264-8i RAID 0/1, 256MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-129
RAID BBU **Recommended**	**RAID Battery Backup Unit** for LSI MegaRAID SAS 9264	N8103-121
Cable **Required**	**Internal SATA Cable** 1x mini-SAS to 2x SATA	K410-253(00)
HDD Cage	**3.5-inch HDD Cage** 2 x 3.5-inch non hot plug (fixed) hard drive bays	(Standard)
HDD **2 slots available**	**160GB HDD** 1 x 160 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-372
	250GB HDD 1 x 250 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-373
	500GB HDD 1 x 500 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-343
	1TB HDD 1 x 1 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-260
	2TB HDD 1 x 2 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-284

NOTE:

- All hard drives within a RAID array should be of the same capacity.

4.2.4 3.5-inch Drive with RAID 0/1 Controller with 512 MB Cache

Category	Product Name / Description	Part Number
Storage Controller Required	**RAID Controller(512MB, RAID0/1/5/6)** Promise SuperTrak EX8760T-512 RAID 0/1/5/6/10/50, 512MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-134
RAID BBU Recommended	**RAID Battery Backup Unit** for Promise SuperTrak EX8760T	N8103-141
Cable Required	**Internal SATA Cable** 1x mini-SAS to 2x SATA	K410-253(00)
HDD Cage	**3.5-inch HDD Cage** 4 x 3.5-inch non hot plug (fixed) hard drive bays	(Standard)
HDD 2 slots available	**160GB HDD** 1 x 160 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-372
	250GB HDD 1 x 250 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-373
	500GB HDD 1 x 500 GB, 3.5-inch, SATA2, 7,200 rpm	N8150-343
	1TB HDD 1 x 1 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-260
	2TB HDD 1 x 2 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-284
	3TB HDD 1 x 3 TB, 3.5-inch, SATA2, 7,200 rpm	N8150-339

NOTE:

- All hard drives within a RAID array should be of the same capacity.

4.2.5 2.5-inch Drive with Embedded SATA Controller

Category		Product Name / Description	Part Number
Storage Controller		**Embedded SATA Controller** 4 x SATA ports, RAID 0/1/10 capable	(Standard)
Cable Required		**Internal SATA Cable** 3x SATA to 1x mini-SAS	K410-241(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
HDD 4 slots available	**SATA**	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE

- Embedded SATA RAID controller is supported only on Windows operating systems. An optional RAID controller is required to configure RAID array for other operating systems.
- All hard drives within a RAID array should be of the same capacity and rotation speed.
- Hot plug insertion/removal is not supported with the Embedded SATA non-RAID controller..

4.2.6 Up to three 2.5-inch Drive with RAID 0/1 Controller with 128 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller (128MB, RAID 0/1)** Promise SuperTrak TX8760T-128 RAID 0/1, 128MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-128
RAID BBU Recommended		**RAID Battery Backup Unit** for Promise SuperTrak EX8760T	N8103-141
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
HDD 3 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- Mixing SAS and SATA hard drives in the same system is not supported.

4.2.7 Up to three 2.5-inch Drive with RAID 0/1 Controller with 256 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller (256MB, RAID 0/1)** LSI MegaRAID SAS 9264-8i RAID 0/1, 256MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-129
RAID BBU Recommended		**RAID Battery Backup Unit** for LSI MegaRAID SAS 9264	N8103-121
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
HDD 3 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- Mixing SAS and SATA hard drives in the same system is not supported.

4.2.8 Up to three 2.5-inch Drive with RAID 5/6 Controller with 256 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller (256MB, RAID 0/1/5/6)** LSI MegaRAID SAS 9264-8i RAID 0/1/5/6/10/50, 256MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-130
RAID BBU Recommended		**RAID Battery Backup Unit** for LSI MegaRAID SAS 9264	N8103-121
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
HDD 3 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- Mixing SAS and SATA hard drives in the same system is not supported.

4.2.9 Up to three 2.5-inch Drive with RAID 5/6 Controller with 512 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller(512MB, RAID0/1/5/6)** Promise SuperTrak EX8760T-512 RAID 0/1/5/6/10/50, 512MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-134
RAID BBU Recommended		**RAID Battery Backup Unit** for Promise SuperTrak EX8760T	N8103-141
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
HDD 3 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- Mixing SAS and SATA hard drives in the same system is not supported.

4.2.10 Up to five 2.5-inch Drive with RAID 0/1 Controller with 128 MB Cache

Category		Product Name / Description	Part Number
Storage Controller **Required**		**RAID Controller (128MB, RAID 0/1)** Promise SuperTrak TX8760T-128 RAID 0/1/10, 128MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-128
RAID BBU **Recommended**		**RAID Battery Backup Unit** for Promise SuperTrak EX8760T	N8103-141
Cable **Required**		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
Optional HDD Cage **Required**		**Additional 2.5-Inch HDD Cage** 2x 2.5-inch hot plug hard drive bays Including 1x mini-SAS to 1x mini-SAS cable	N8154-37
HDD **5 slots available**	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- SAS and SATA hard drives must be installed in separate HDD Cages.
- No internal tape drive can be installed in the drive configuration.

4.2.11 Up to five 2.5-inch Drive with RAID 0/1 Controller with 256 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller (256MB, RAID 0/1)** LSI MegaRAID SAS 9264-8i RAID 0/1, 256MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-129
RAID BBU Recommended		**RAID Battery Backup Unit** for LSI MegaRAID SAS 9264	N8103-121
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
Optional HDD Cage Required		**Additional 2.5-Inch HDD Cage** 2x 2.5-inch hot plug hard drive bays Including 1x mini-SAS to 1x mini-SAS cable	N8154-37
HDD 5 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- SAS and SATA hard drives must be installed in separate HDD Cages.
- No internal tape drive can be installed in the drive configuration.

4.2.12 Up to five 2.5-inch Drive with RAID 5/6 Controller with 256 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller (256MB, RAID 0/1/5/6)** LSI MegaRAID SAS 9264-8i RAID 0/1/5/6/10/50, 256MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-130
RAID BBU Recommended		**RAID Battery Backup Unit** for LSI MegaRAID SAS 9264	N8103-121
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
Optional HDD Cage Required		**Additional 2.5-Inch HDD Cage** 2x 2.5-inch hot plug hard drive bays Including 1x mini-SAS to 1x mini-SAS cable	N8154-37
HDD 5 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- SAS and SATA hard drives must be installed in separate HDD Cages.
- No internal tape drive can be installed in the drive configuration.

4.2.13 Up to five 2.5-inch Drive with RAID 5/6 Controller with 512 MB Cache

Category		Product Name / Description	Part Number
Storage Controller Required		**RAID Controller(512MB, RAID0/1/5/6)** Promise SuperTrak EX8760T-512 RAID 0/1/5/6/10/50, 512MB, Int. 8, PCIe 2.0 x8, SAS 6Gb/s, SATA 3Gb/s, LP / FH	N8103-134
RAID BBU Recommended		**RAID Battery Backup Unit** for Promise SuperTrak EX8760T	N8103-141
Cable Required		**Internal SAS/SATA Cable** 1x mini-SAS to 4x fixed SAS	K410-180(00)
HDD Cage		**2.5-inch HDD Cage** 3 x 2.5-inch hot plug hard drive bays	(Standard)
Optional HDD Cage Required		**Additional 2.5-Inch HDD Cage** 2x 2.5-inch hot plug hard drive bays Including 1x mini-SAS to 1x mini-SAS cable	N8154-37
HDD 5 slots available	**SAS**	**146.5GB HDD** 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-374
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-375
		450GB HDD 1 x 450 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-376
		600GB HDD 1 x 600 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-377
		900GB HDD 1 x 900 GB, 2.5-inch, SAS 6Gb/s, 10,000 rpm	N8150-332
		73.2GB HDD 1 x 73.2 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-378
		146.5GB HDD 1 x 146.5 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-379
		300GB HDD 1 x 300 GB, 2.5-inch, SAS 6Gb/s, 15,000 rpm	N8150-331
	SATA	**160GB HDD** 1 x 160 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-276
		500GB HDD 1 x 500 GB, 2.5-inch, SATA2, 7,200 rpm	N8150-277
		1TB HDD 1 x 1 TB, 2.5-inch, SATA2, 7,200 rpm	N8150-334
	SSD	**100GB SSD** 1 x 100 GB, 2.5-inch, SATA2	N8150-707

NOTE:

- All hard drives within a RAID array should be of the same capacity and rotation speed.
- SAS and SATA hard drives must be installed in separate HDD Cages.
- No internal tape drive can be installed in the drive configuration.

5 Internal Optical Drive

Available Bays: 1

Product Name / Description	Part Number
Slim DVD-ROM drive	(Standard)
Internal DVD Super Multi Drive Slim DVD Super Multi drive, not including writing software	N8151-104F

NOTE:

- To install internal DVD Super Multi drive, the standard DVD-ROM drive needs to be removed.

6 Internal Tape / RDX Drives

6.1 Tape / RDX Drive Selection

Refer to the section in accordance with your type of tape drives.

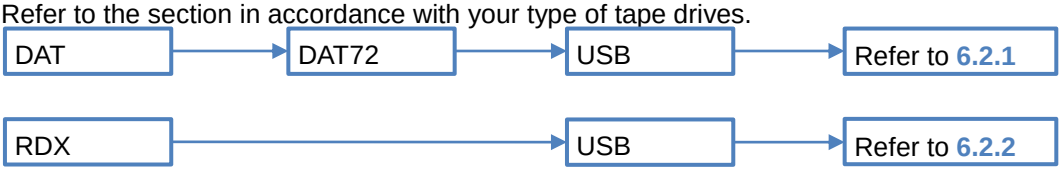

NOTE:

- No tape drive can be installed if you install the optional 2.5-inch HDD Cage.

6.2 Tape / RDX Configuration

6.2.1 DAT / USB

Category	Product Name / Description	Part Number
Controller	**Internal USB Controller** 1 x USB port or 1 x pin-header for front panel USB	(Standard)
Cable **Required**	**Internal USB cable** 1x Internal USB to 1x USB device **NOTE**: The cable is required to install USB tape drive only.	K410-255(00)
	Internal USB cable 1x pin-header for front panel USB to 1x USB device and 1x front panel USB port **NOTE**: The cable is required to install internal flash memory and USB tape drive. A USB tape drive occupies one front USB port.	K410-245(00)
Drive **1 bays available**	**Internal DAT (USB)** DDS3 / DDS4 / DAT72, Native capacity 36 GB **NOTE**: DDS1 / DDS2 format are not supported	N8151-69

6.2.2 RDX

Category	Product Name / Description	Part Number
Controller	**Internal USB Controller** 1 x USB port or 1 x pin-header for front panel USB	(Standard)
Cable **Required**	**Internal USB cable** 1x Internal USB to 1x USB device **NOTE**: The cable is required to install USB tape drive only.	K410-255(00)
	Internal USB cable 1x pin-header for front panel USB to 1x USB device and 1x front panel USB port **NOTE**: The cable is required to install internal flash memory and USB tape drive. A USB tape drive occupies one front USB port.	K410-245(00)
Drive **1 bays available**	**Internal RDX (USB)**	N8151-86

7 Internal Flash Memory

Available socket: 1

Product Name / Description	Part Number
Internal Flash Memory Internal flash memory to enable software and tools in the EXPRESSBUILDR DVD without DVD media **NOTE:** Before use, software and tools must be copied from the EXPRESSBUILDER DVD to the flash memory. The following operations can be performed with the flash memory: - Installation of Windows server with express setup - Installation of Starter Pack—the package of NEC qualified drivers and system setting tools - Installation of NEC ESMPRO Agent and Universal RAID Utility - Performance of the Test and Diagnosis Tool	N8115-05

8 PCI Card

8.1 LAN Controller

Category	Product Name / Description	Part Number
LAN	**1000BASE-T Adapter (2ch)** Broadcom NetXtreme II 5709 Dual port Network Interface Card PCIe x4, LP / FH **NOTE:** Teaming and bonding features across the standard LAN and the LAN controller are supported on Windows Server 2003R2 / 2008 / 2008R2 and Red Hat Linux 5.x Operating system. Up to 2 teams per system and 2 ports per team is supported in the teaming and bonding feature.	N8104-134

8.2 Serial Port Adapter

Product Name / Description	Part Number
Serial port adapter Serial port fixed to PCI bracket	N8117-01A

9 Other Add-in Components

9.1 Input Devices

Product Name / Description	Part Number
Keyboard and Mouse Pack (US) 1 x 104-keys White USB keyboard, 1 x USB White Optical Wheel Mouse	(Standard)

10 Add-on Components

10.1 Server Management License

The server integrates the EXPRESSSCOPE Engine 3 as standard. Refer to **Server Management** for the standard management features. For more extensive remote KVM and remote media features, choose the following kit.

Product Name / Description	Part Number
Remote KVM and Media License kit License for one server. Remote KVM and remote media are enabled regardless of OS status. Remote KVM: - Displays a graphics console on the web browser of the remote terminal (PC/server). - Controls keyboard and mouse via the remote terminals' web browser Remote media: Enables the user to use the CD / DVD / FD / Flash memory of the remote terminals (PC/server) as if accessing the local drives.	N8115-04

10.2 Dust / Insect Proof Kit

The server supports the dust resistant feature. Choose the following kit to install the system in dusty places.

Category	Product Name / Description	Part Number
Front Bezel	**Dust Proof Bezel with Sensor** Including 1 set of filter replacement sensors, 1 set of dust proof filters	N8146-19
Filter	**Dust proof filter (5 pcs.)** For N8146-19 Dust Proof filter Removal capacity of particles : Up to 1 µm-sized	N8147-22

10.3 Flash FDD

Choose the Flash FDD if you need to prepare an alternative device for a floppy drive.

Product Name / Description	Part Number
Flash FDD USB flash emulating USB floppy disk, Native capacity 1.44 MB	N8160-86

10.4 Medium and Cartridge

Category	Product Name	Drive supported	Part Number
RDX	RDX Cartridge (320GB)	N8151-86	N8152-26
	RDX Cartridge (500GB)	N8151-86	N8152-27
	RDX Cartridge (1TB)	N8151-86	N8152-33
DAT	DAT72(36GB) Medium 5 pack	N8151-69	N8152-08

References

Note for Ordering

Parts number provided may be needed to modify by country/region when you order the products.

For example, the operable parts number for N8100-1738F in EMEA is N8100-1730F-O, adding "-O", the country-specific identifier for EMEA, after the parts number.

Please consult our sales representative for your country identifier.

Server Management

The EXPRESSSCOPE Engine 3, integrated into the GT110d-S server, provides superior remote control and system management features listed in the table below.

		Standard	With Remote KVM and Media License kit
Hardware monitoring	Temperature/voltage/power/ fan /degeneration (memory/hard drive)	✓	✓
	Hardware event log collection	✓	✓
Boot monitoring	Booting, BIOS/POST stall, OS stall, shutdown	✓	✓
Alerting	HW error, Boot error and OS panic (by SNMP, E-Mail)	✓	✓
Remote KVM (via LAN)	POST/BIOS setup, DOS utility	✓	✓
	Panic screen, Boot screen	✓	✓
	Text-based screen (OS console)	✓	✓
	GUI-based screen (OS console)	-	✓
Remote control (via LAN)	Remote reset/power on-off/ dump	✓	✓
	Configure power capping setting	✓	✓
	Configure BIOS setting (items limited)	✓	✓
	OS shutdown	✓	✓
	Remote media (CD/DVD/FD)	-	✓
	Server Management Command Line Protocol (DMTF compliant)	✓	✓
	Remote control via Web browser (without dedicated app)	✓	✓
	Remote batch	✓	✓
	Scheduling (without UPS)	✓	✓
Maintenance	Save/restore BIOS/BMC setting to/from a dedicated flash memory	✓	✓
Others	Set automatic IP address via DNS/DHCP	✓	✓
Remote wakeup	Wake On LAN, Wake On Ring	✓	✓
Centralized management	Monitoring and control of multiple servers	✓	✓
Industry standard	IPMI	2.0	2.0

OS Support Matrix for PCI Cards

Part Number	Product Name	WS 2008R2	WS 2008	WS 2008 x64	WS 2003R2	WS 2003R2 x64	RHEL 5	RHEL 5 x64	RHEL 6	RHEL 6 x64	VMware ESXi 5.0
N8103-128	RAID Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
N8103-129	RAID Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-130	RAID Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-134	RAID Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8104-134	1000BASE-T Adapter	✓	✓	✓	✓	✓	✓	✓	✓	✓	-

Supporting PCI Cards and Installable Slots

Part Number	Product Name	Slots				Remarks
	Slot # :	#1	#2	#3	#4	
	PCI Slot:	x4	x4	x16	32-bit	
	Card height:	LP				
	Slot type:	x8	x8	x16	5V	
	Installable card length (mm) :	167				
N8103-128	RAID Controller (128MB, RAID 0/1) [PCIe 2.0 x8]	✓	-	-	-	
N8103-134	RAID Controller (512MB, RAID 0/1/5/6) [PCIe 2.0 x8]	✓	-	-	-	
N8103-129	RAID Controller (256MB, RAID 0/1) [PCIe 2.0 x8]	✓	-	-	-	
N8103-130	RAID Controller (256MB, RAID 0/1/5/6) [PCIe 2.0 x8]	✓	-	-	-	
N8104-134	1000BASE-T Adapter(2ch) [PCIe x4]	✓	✓	✓	-	
N8117-01A	Serial Port Adapter	✓	✓	✓	✓	Max. 1

Copyright Notice and Liability Disclaimer

The information contained herein is subject to change without notice.

Microsoft and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries

Intel and Xeon are registered trademarks or trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds.

Red Hat is a registered trademark of Red Hat, Inc. in the U.S.

All other products, brands, or trade names used in this document are trademarks or registered trademarks of their respective holders.

NEC shall not be liable for technical or editorial errors or omissions contained herein.

For hard drive capacity measurements, 1 GB = 1 billion bytes. Actual formatted capacity is less.

The USB interface is not guaranteed to work properly for all USB devices.

Revision History

Revision	Date	Description
1.0	February 13, 2011	Initial release